


TUCHEL-SNOW

SK-F

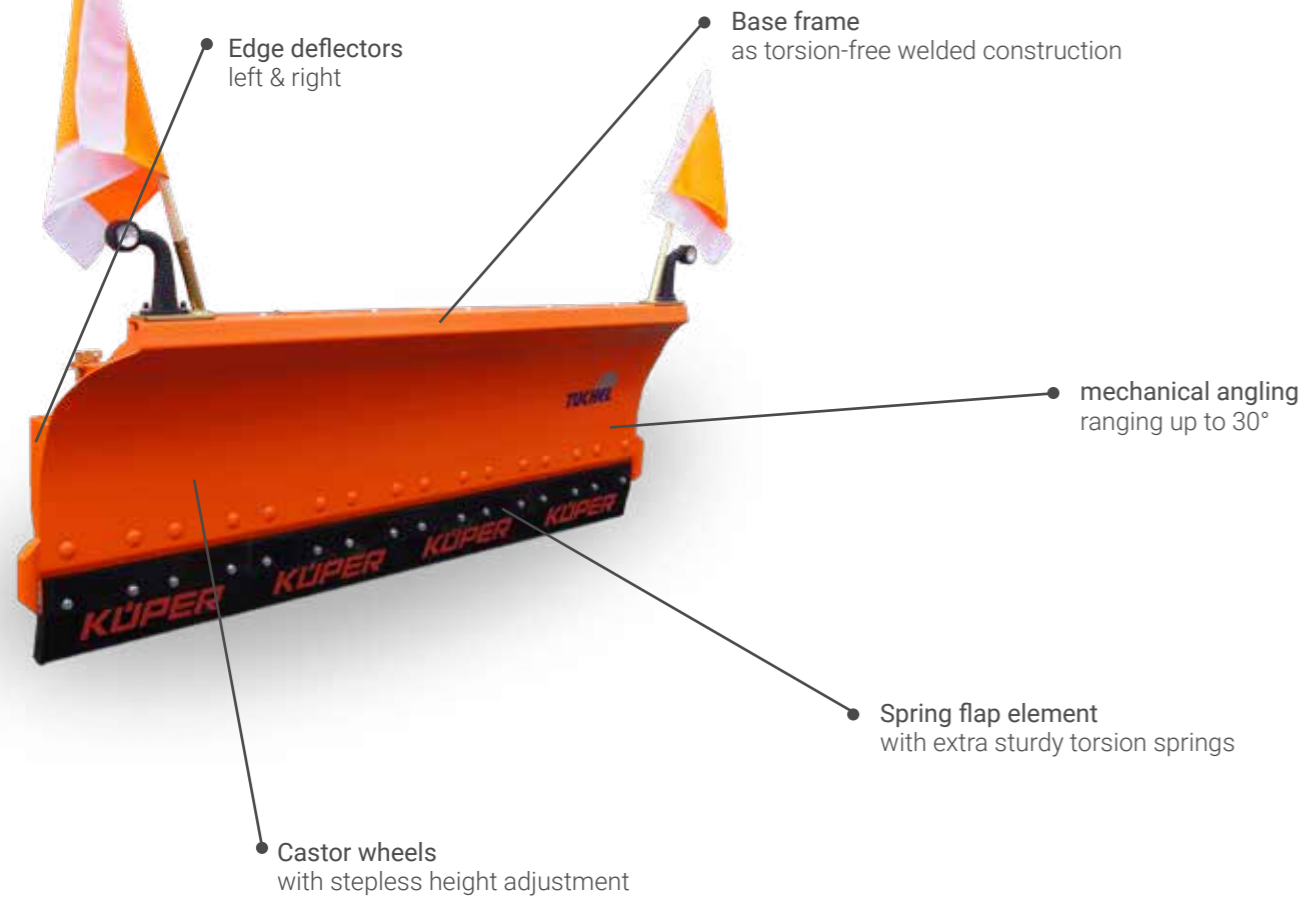

Due to its compact design, the SK-F snow blade is particularly suitable for clearing in municipal areas mounted on the front of small tractors, yard loaders, wheel loaders, forklift trucks and municipal vehicles.

The sturdy base frame is equipped with non-icing spring flap segments and is optionally available with torsion-resistant PU-lip, steel trim or a highly abrasion-resistant municipal scraper bar. The bevels in the side and upper shield areas ensure a high degree of stability and the mechanical angling enables lateral clearing.

In addition, steplessly height-adjustable castors and edge deflectors, which protect the blade from damage, are included in the basic equipment. The blade has an optimised tilt angle, resulting in clean clearing results and maximum smoothness.

INSTALLATION VARIANTS

- » A-frame
- » Three-point linkage
- » Yard loader attachment / quick hitch
- » Municipal vehicle-type attachment
- » Fork-tines attachment

optional EQUIPMENT VERSIONS

- » Hydraulic angling for easy swivelling with optional pressure relief valve
- » Side levelling for optimum ground adjustment
- » Extra sturdy wheels Ø 250 x 80 mm for heavy-duty application.
- » Limiting lights (LED) acc. to StVZO (road traffic licensing authority) when driving in road traffic
- » Signal flag holder und signal flags
- » Special paint according to RAL (standard RAL 2004)



TECHNICAL DATA

	150 cm	180 cm	200 cm	225 cm
Clearing width (straight/angled) [cm]	150/132	175/154	200/176	225/198
Total width (max. extension) [cm]	160	185	210	235
Weight (without attachment) [kg]	165	185	200	215
Height [cm]	70	70	70	70
Angled position	up to 30°	up to 30°	up to 30°	up to 30°



SNOW

SK-F