


TUCHEL-SNOW

L-SF

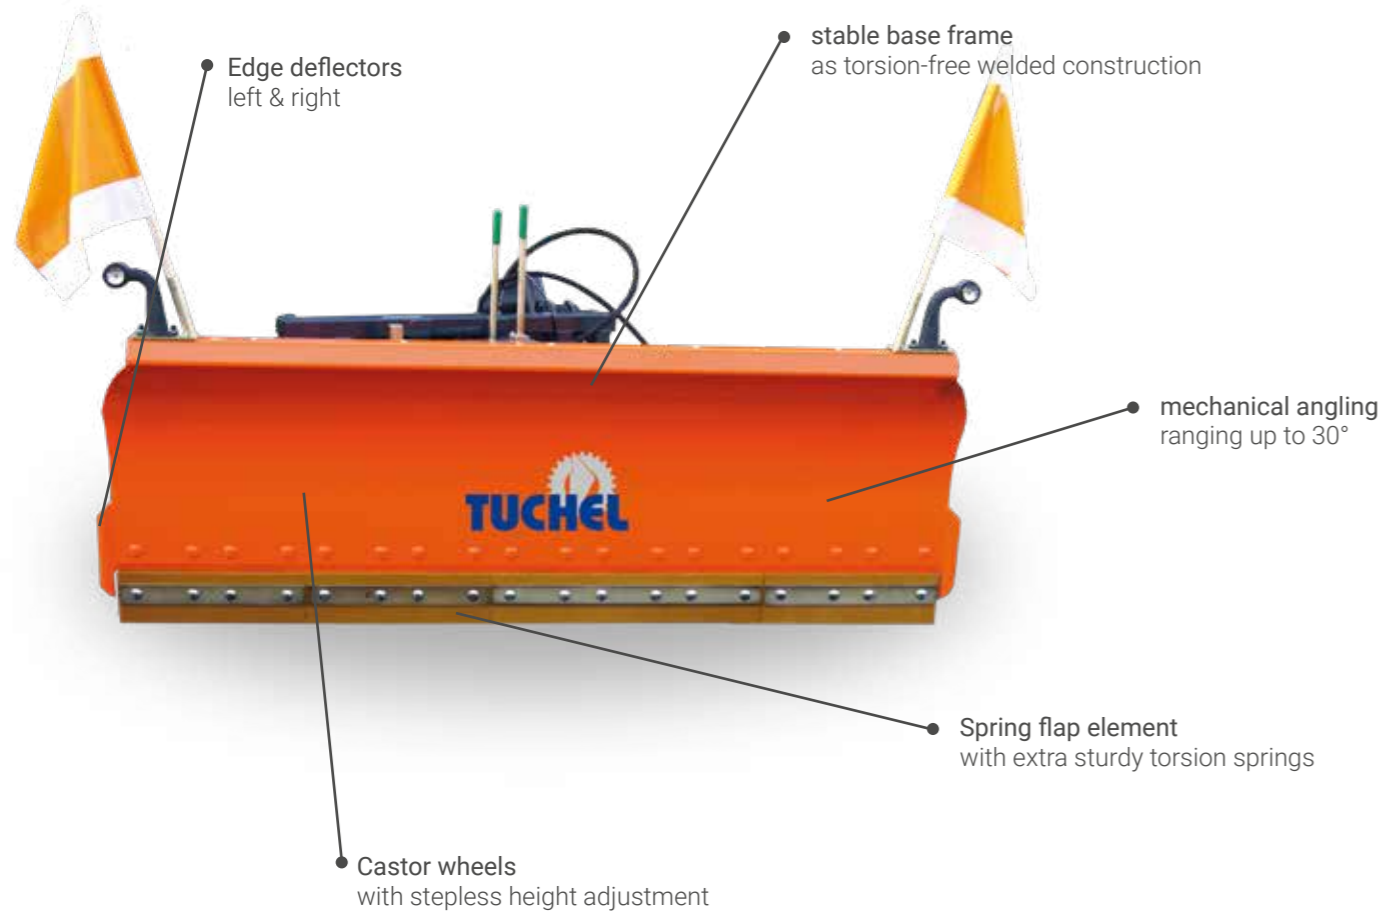

The L-SF lightweight snow blade can effectively clear snow from all surfaces, even in harsh weather conditions, and can be fitted on the front of wheel loaders, tractors and Unimog vehicles.

The sturdy base frame is equipped with non-icing spring flap segments and is optionally available with torsion-resistant PU-lip, steel trim or a highly abrasion-resistant municipal scraper bar. The bevels in the side and upper shield areas ensure a high degree of stability and the mechanical angling enables lateral clearing.

In addition, steplessly height-adjustable castors and edge deflectors, which protect the blade from damage, are included in the basic equipment. The blade has an optimised tilt angle, resulting in clean clearing results and maximum smoothness.

INSTALLATION VARIANTS

- » A-frame
- » Three-point linkage
- » Wheel loader / telescopic attachment
- » Attachment plate fitting to Unimog vehicles DIN 76060
- » Fork-tines attachment

optional EQUIPMENT VERSIONS

- » Hydraulic angling for easy swivelling with optional pressure relief valve and/or pressure holding valve
- » Side levelling for optimum ground adjustment
- » Extra sturdy wheels Ø 250 x 80 mm for heavy-duty application.
- » Snow guide cloth for the driver's good visibility
- » Limiting lights (LED) acc. to StVZO (road traffic licensing authority) when driving in road traffic
- » Signal flag holder und signal flags
- » Special paint according to RAL (standard RAL 2004)



TECHNICAL DATA

	200 cm	225 cm	250 cm	275 cm	300 cm
Clearing width (straight/angled) [cm]	200/175	225/196	250/218	275/249	300/259
Total width (max. extension) [cm]	210	235	260	285	310
Weight (without attachment) [kg]	277	300	321	345	366
Height [cm]	82	82	82	82	82
Angled position	up to 30°	up to 30°	up to 30°	up to 30°	up to 30°

SNOW

